

### G1020

## Serial GPS Receiver

with Power on Pin 9 DB9 Cable

SiRFstarIII serial GPS receiver for use with vehicle cradles offering 5v DC power out on DB9 pin 9. Includes GPS receiver and connector cable.

### Technical Specifications

#### > Receiver

GPS Chipset:	SiRFstar III
Chipset Processor:	ARM7/TDMI – 49MHZ
Frequency:	L1, CA code
Signal Acquisition:	1920 time/frequency search channels
Channels:	20 Channels; all-in-view tracking
Max. Update Rate:	1Hz
Sensitivity:	-159dBm
DGPS Source:	Default: WAAS/EGNOS
System Back Up:	Built-in Lithium-Ion rechargeable battery
Antenna Type:	Built-in Antenna

#### > Acquisition Rate

Reacquisition:	100msec
Hot Start:	<1 second
Warm Start:	<38 seconds
Cold Start:	<42 sec

#### > Protocol

Default:	NMEA-0183
Programmable:	NMEA- VTG, GLL / SiRF Binary

#### > Power

Draw:	80mA at 3.3V; DC power adaptor
Internal Battery:	3v (for GPS module only)

#### > Dynamic Conditions

Altitude:	<18,000 meter
Velocity:	< 515 meter/second
Acceleration:	<4g

#### > User Environment

Water Seal:	IPX7
Operating Temperature:	-20°C to +60°C
Storage Temperature:	-40°C to 70°C
Humidity:	5% to 95%, non-condensing



#### > Physical Characteristics

Depth:	62.0mm
Width:	46.1mm
Height:	18.0mm
Weight:	95g


#### > Accuracy

OrbitGPS receivers offer typical accuracies of 3-5 meters uncorrected, and 3 meters or better with correction.\*

#### > Operating Systems Supported

Windows Mobile5.0; ; Windows Mobile /PPC 2003, Windows XP, Windows Vista

#### > Part Number: G1020

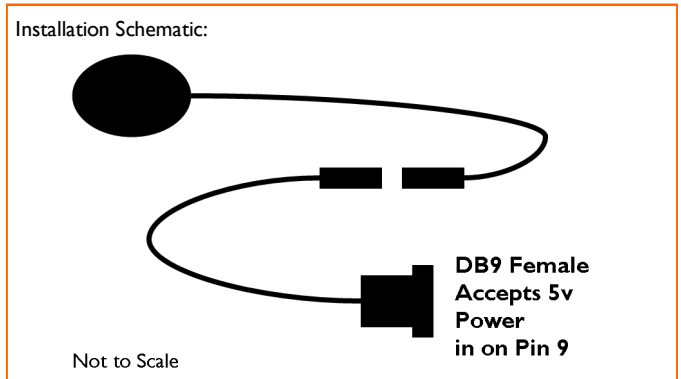

\* Accuracy subject to degradation based on environmental and positional conditions. Rated accuracy provides 95% Circle Error Probability (CEP) position accuracies of <5 meters with WAAS correction and <10 meters uncorrected.

For more information on the G1020 Serial GPS with Power on Pin 9 Cable, contact OrbitGPS at sales@OrbitGPS.com or +1.203.654.7771

**OrbitGPS**  
+1 203.654.7771  
sales@OrbitGPS.com  
www.OrbitGPS.com